


The GigRig High Current Adapter Manual



As part of The GigRig Modular Power Supply solutions, our high current adapters are all designed to provide clean and reliable DC power. Each adapter effectively isolates pedals as though their own individual wall power supplies are being used. Our High Current Adapters also have the advantage of reverse isolation, so any noise from crosstalk between the powered pedal and other pedals on your pedal-board is eliminated.

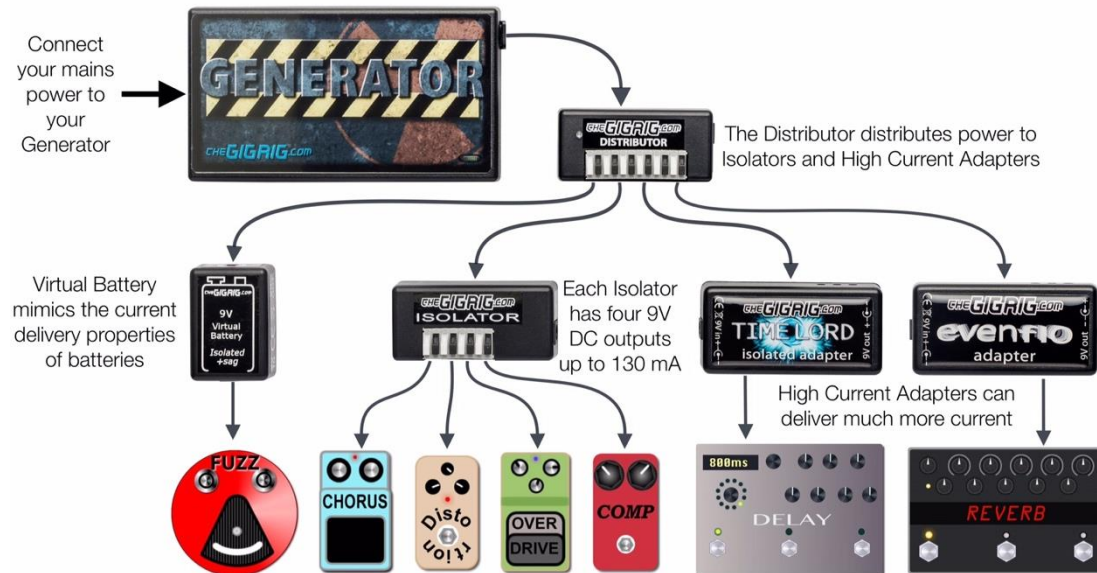

Instructions For Use:

The GigRig Generator connects directly to a Distributor, which is then connected to our High Current Adapters (HCAs) and Isolators to power your pedals. Simply match the power requirement and DC polarity of your pedal to the chart below. For example: All Strymon pedals need a TimeLord adapter as they use the industry standard 9V DC at 500mA with centre negative 2.1 mm plugs.

HCA technical specifications:

HCA	VOLTAGE	CURRENT	PLUG	POLARITY
TimeLord	9V DC	550 mA	2.1 mm	Centre Neg
EvenFlo	9V DC	550 mA	2.5 mm	Centre Pos
Supa-Nova	12V DC	550 mA	2.1 mm	Centre Neg
El Paso	15V DC	400 mA	2.1 mm	Centre Pos
Doubler	18V DC	300 mA	2.1 mm	Centre Neg
ElectrΩMan	24V DC	300 mA	2.5 mm	Centre Pos

The GigRig High Current Adapters are perfect for any effect that draws more current than a standard isolated 9V DC output can deliver. It's essential to power pedals correctly to get the most out of them, especially for the new breed of digital pedals from companies such as Strymon, TC Electronic, Eventide, Empress Effects, Source Audio etc.,

**DO NOT COVER THE ADAPTER, IT MAY OVERHEAT AND SWITCH OFF!
IT IS NORMAL FOR THE ADAPTER TO RUN WARM.**

Connect the Adapter output directly to the pedal and plug the normal 9V centre negative supply from the Distributor into the adapter input. **Use the TheGigRig Generator only - We cannot guarantee the performance of the adapter from any other power supply.**

Over Current Protection:

The GigRig HCAs have a 520mA continuous current limit; however, the HCAs can deliver more current in short bursts (up to 1200mA) required by some pedals that have a high current start up procedure, for example.

Short Circuit and Temperature Protection:

Our High Current Adapters are fitted with an over temperature safety protector. If the adapter has its output short-circuited for more than a few minutes, the over temperature sensor will automatically switch off the DC output. When the short is removed, the HCA will take a few seconds to cool down and restore power to the output.

Input Protection:

All our High Current Adapters have input protection. They will protect themselves from input reverse voltages by shorting its input and shutting down the main supply to protect itself and all other pedals.

Safety: The GigRig High Current Adapter is designed for indoor use only. Don't get it wet.

Technical Specifications:

Type: DC-DC full isolation. Overload, short circuit and temperature protected.

Temperature trip when left shorted, or covered for long periods.

Output Ground. The DC output is isolated from all earth.

Input Voltage. 9v DC at 1A

Input is reverse diode protected.

Regulations:

Your power supply conditioner conforms to BS EN 60950-2002 safety standard. Low voltage device.

Warranty:

The GigRig warrants the product to be free from defects in material and workmanship for a period of 2 years from the original date of purchase. If the product fails within the warranty period, The GigRig will repair or, at our discretion, replace the product and cover the cost of return shipping to the original purchaser. This warranty covers defects in manufacturing discovered while using this product as recommended by The GigRig. This warranty does not cover loss or theft, nor does the coverage extend to damage caused by misuse, abuse, unauthorized modification, improper storage, lightning, or natural disasters. Damage caused by any of the above circumstances may result in a non-warranty repair fee.

Legal:

In the case of malfunction, the purchaser's sole recourse shall be repair or replacement, as described in the preceding paragraphs. The GigRig will not be held liable to any party for damages that result from the failure of this product. Damages excluded include, but are not limited to, the following: lost profits, lost savings, damage to other equipment, and incidental or consequential damages arising from the use, or inability to use this product. In no event will The GigRig be liable for more than the amount of the purchase price, not to exceed the current retail price of the product. The GigRig disclaims any other warranties, express or implied. By using the product, the user accepts all terms herein.

Disposal:

Return the unit to The GigRig Ltd for disposal or use standard disposal for electrical equipment recommended in your country



CE Approved. Fully compliant with the RoHSV standard.